




LightTech

Standard and Hybrid Adapters

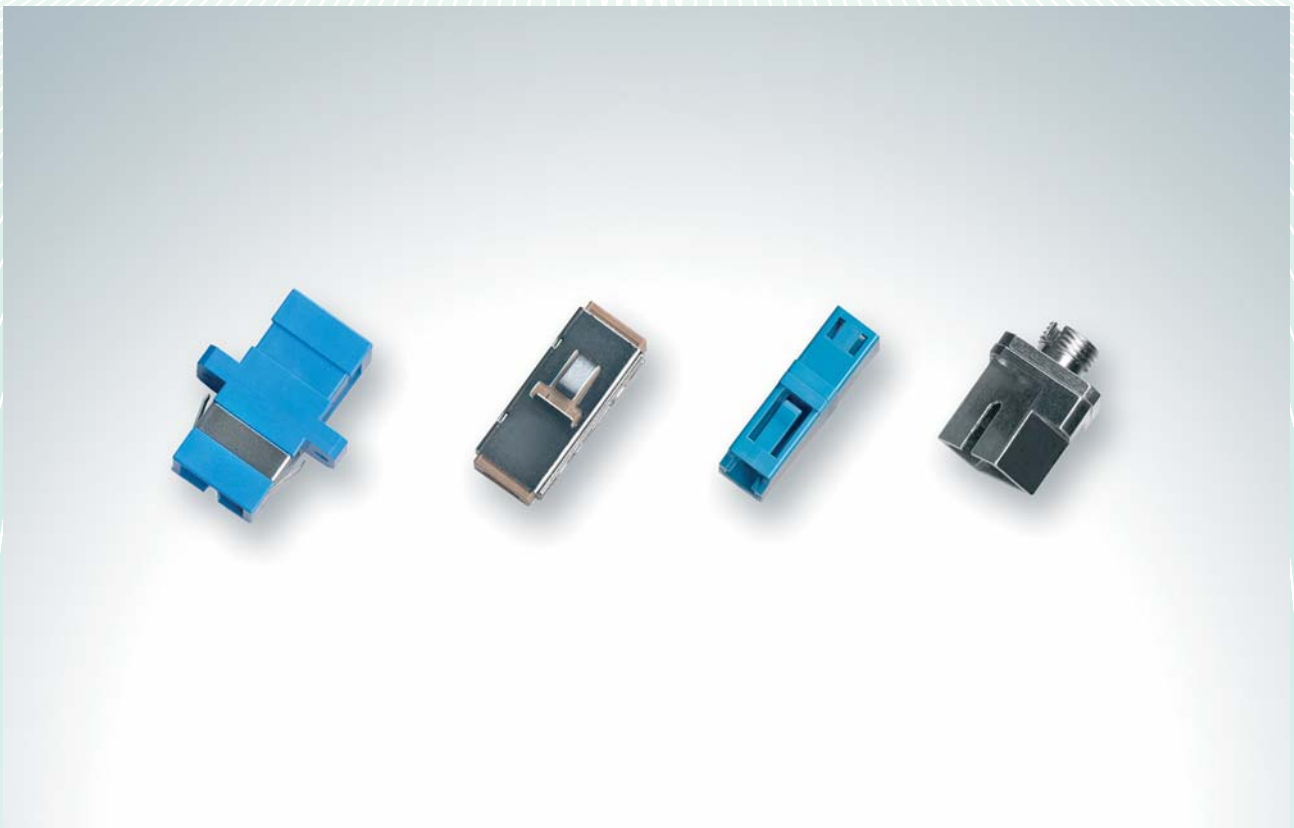

Features

- Full compliance with international specs
- Low Insertion loss
- Several types of flanges
- Oneway or multiway
- Zirconia or Phosphor Bronze split sleeve
- Available types compliant with UL94 V0

Specifications

- **Fiber type:** **Single Mode and Multi Mode**
- **Insertion Loss:** According to connector specs
- **Number of matings:** >1.000
- **Operating temperature:** -25°C / +70°C
- **Storage temperature:** -40°C / +70°C

Ordering information

Code structure

